

日期/Date

档案员  
Filing Clerk

1




2

3

4

5

6

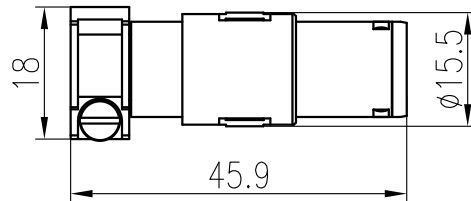

## 技术参数:

## 插芯:

- 插针数: 1+屏蔽
- 额定电流: 16A
- 额定电压: 50V
- 额定脉冲电压: 0.8kV
- 污染等级: 3
- 绝缘阻抗:  $>10^{10}\Omega$

## - 材料:

- 绝缘体: 聚碳酸酯
- 外导体: 锌合金

- 接触电阻:  $<4m\Omega$ - 阻抗: 50 $\Omega$ - 温度范围:  $-40^{\circ}\text{C} - +85^{\circ}\text{C}$ 

## - 依据UL 94的阻燃等级: V0

## - 外导体表面: 镀

## - 电缆直径: 3-9.5mm

- 可插拔次数:  $>500$ 

## 插针:

## - 接线方式: 冷压连接

## - 材料: 铜合金

## - 表面处理: 镀金

- 接触电阻:  $<1m\Omega$ - 线径范围: 0.14-4mm<sup>2</sup>(26-12 AWG)

## - 工具:

## · 冷压钳:

TL02G(0.5-4mm<sup>2</sup>)TL02(0.14-0.37mm<sup>2</sup>)

## · 退针器: TL01

## Technical specification:

## Inserts:

- No. of contact: 1+shielding
- Rated current: 16A
- Rated voltage: 50V
- Rated impulse voltage: 0.8kV
- Pollution degree: 3
- Insulation resistance:  $>10^{10}\Omega$

## - 材料:

- Insulator: polycarbonate
- Outer conductor: zinc alloy

- Contact resistance:  $<4m\Omega$ - Impedance: 50 $\Omega$ - Temperature range:  $-40^{\circ}\text{C} - +85^{\circ}\text{C}$ 

## - Flammability acc.to UL 94: V0

## - Outer surface finish: nickel

## - Cable diameter: 3-9.5mm

- Mating cycles:  $>500$ 

## Contacts:

## - Terminal: crimp terminal

## - Material: copper alloy

## - Surface: hard-gold plated


- Contact resistance:  $<1m\Omega$ - Wire gauge: 0.14-4mm<sup>2</sup>(26-12 AWG)

## - Tools:

## · Crimp contact tool:

TL02G(0.5-4mm<sup>2</sup>)TL02(0.14-0.37mm<sup>2</sup>)

## · Contact removal tool: TL01

						表面处理 Finish	-			图号 Drawing No.	-	
						材料 Material	-			产品代号 Part Code	EMC-001-FC/E	
标记 Mark	处数 Number	变更描述/Description				签名 Signature	日期 Date				产品料号 Part No.	1290010200083
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	-	
绘图 Drawn	BQ LUO	18.10.2010	标准化 Stand.	-	-	1:1	V1.0	27g	-			
审核 Checked	P RAO	18.10.2010										
工艺 Process	-	-	批准 Approved	YY LIN	18.10.2010	All Dimensions in mm Original Size DIN A 4			 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD			

1

2

3

4

5

6