
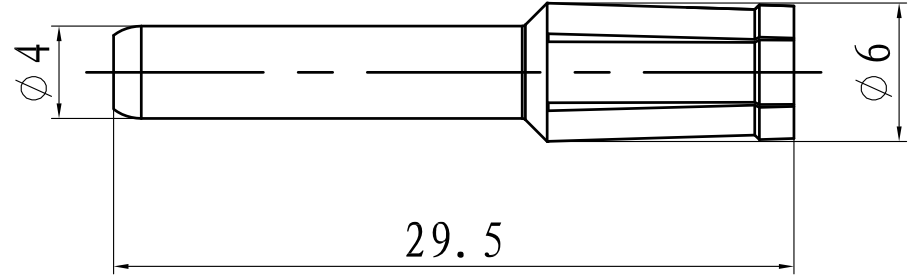


日期/Date	1				
档案员/Archive Clerk	1				
未注公差所依标准					
基本线性尺寸分段					
公差等级	0.5~3	>3~6	>6~30	>30~120	>120~400
中等m	±0.1	±0.1	±0.2	±0.3	±0.5
基本倒角尺寸分段					
公差等级	0.5~3	>3~6	>6~30	>30	
中等m	±0.2	±0.5	±1	±2	
基本角度尺寸分段					
公差等级	~10	>10~50	>50~120	>120~400	
中等m	±1°	±30'	±20'	±10'	

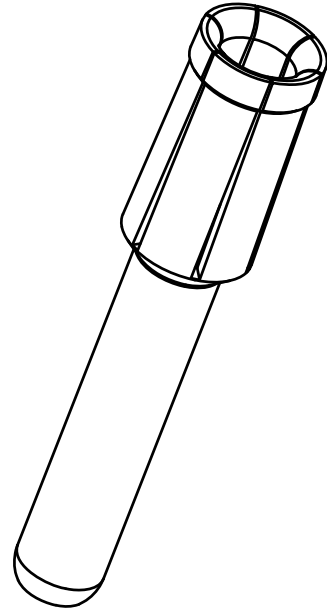

技术参数:

- 材料: 铜合金
- 表面处理: 镀银
- 额定电流: 40A
- 接触电阻: $\leq 0.3m\Omega$
- 线径范围: $4.0mm^2(12 AWG)$
- 可插拔次数: ≥ 500

Technical specification:

- Material: copper alloy
- Surface: hard-silver plated
- Rated current: 40A
- Contact resistance: $\leq 0.3m\Omega$
- Wire gauge: $4.0mm^2(12 AWG)$
- Mating cycles: ≥ 500

标记/Mark		处数/Number		变更描述/Description		签名/Signature		日期/Date		表面处理/Finish	—		图号/Drawing No.	—			
绘图/Drawn		SX HUANG		2017.10.21		标准化/Stand.		—		材料/Material	—		产品代号/Part Code	CCSM-4. 0P			
审核/Checked		HZ LAN		2017.10.21						比例/Scale	版本/REV.	重量/Weight	数量/Qty.	产品料号/Part No.	1010231141251		
工艺/Process						批准/Approved				1:1	T1.0	3.3g	1	产品名称/Part Name	CCSM-4. 0P, 镀银, 焊接C型公插针		
												All Dimensions in mm Original Size DIN A4				厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	